

07-05-00

A

**UTILITY PATENT APPLICATION TRANSMITTAL  
(Small Entity)***(Only for new nonprovisional applications under 37 CFR 1.53(b))*Docket No.  
09125-37382 (S 91,711)

Total Pages in this Submission

**TO THE ASSISTANT COMMISSIONER FOR PATENTS****Box Patent Application  
Washington, D.C. 20231**

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**COSMIC RAY NEUTRON BACKGROUND REDUCTION USING LOCALIZED COINCIDENCE VETO  
NEUTRON COUNTING**

and invented by:

**Howard O. Menlove, Stephen C. Bourrett, Merlyn S. Krick**If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 16 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications *(if applicable)*
  - c. ☒ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
  - d. ☐ Reference to Microfiche Appendix *(if applicable)*
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings *(if drawings filed)*
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

# UTILITY PATENT APPLICATION TRANSMITTAL (Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
09125-37382 (S 91,711)

Total Pages in this Submission

## Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)

a. ☒ Formal      b. ☐ Informal      Number of Sheets 3

4. ☒ Oath or Declaration

a. ☒ Newly executed (original or copy)      ☐ Unexecuted

b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)

c. ☒ With Power of Attorney      ☐ Without Power of Attorney

d. ☐ DELETION OF INVENTOR(S)

Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (usable if Box 4b is checked)

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Computer Program in Microfiche

7. ☐ Genetic Sequence Submission (if applicable, all must be included)

a. ☐ Paper Copy

b. ☐ Computer Readable Copy

c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

## Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & documents)

9. ☒ 37 CFR 3.73(b) Statement (when there is an assignee)

10. ☐ English Translation Document (if applicable)

11. ☒ Information Disclosure Statement/PTO-1449      ☒ Copies of IDS Citations

12. ☐ Preliminary Amendment

13. ☒ Acknowledgment postcard

14. ☒ Certificate of Mailing

☐ First Class      ☒ Express Mail (Specify Label No.): EL 125682095 US

# UTILITY PATENT APPLICATION TRANSMITTAL (Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
09125-37382 (S 91,711)

Total Pages in this Submission

## Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☒ Small Entity Statement(s) - Specify Number of Statements Submitted: 1
17. ☐ Additional Enclosures (please identify below):

## Fee Calculation and Transmittal

### CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	15	- 20 =	0	x \$9.00	\$0.00
Indep. Claims	2	- 3 =	0	x \$39.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$345.00
OTHER FEE (specify purpose) Recording Assignment					\$40.00
TOTAL FILING FEE					\$385.00

- ☒ A check in the amount of \$385.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: 7/3/00

DeWitt M. Morgan  
Signature

DeWitt M. Morgan  
Reg. No. 26,488  
Rodey Law Firm  
P.O. Box 1888  
Albuquerque, NM  
USA  
(505) 786-7375

cc:

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Applicants: Howard O. Menlove et al.

Docket No.: S-91,711

Serial No.:

Examiner:

Filed :

Art Unit:

For : COSMIC RAY NEUTRON BACKGROUND REDUCTION USING  
LOCALIZED COINCIDENCE VETO NEUTRON COUNTING

Assistant Commissioner for Patents  
Washington, DC 20231

**DECLARATION CLAIMING SMALL ENTITY STATUS -**  
**NONPROFIT ORGANIZATION**

Sir:

I hereby declare that I am an official empowered to act on behalf of:

The Regents of the University of California  
1111 Franklin Street, 5th Floor  
Oakland, CA 94607

The above-identified organization is an institution of higher learning.

I hereby declare that the organization identified above qualifies as a nonprofit organization as defined in 37 CFR 1.9(e) for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, with regard to the subject invention described in the above identified patent application.


I hereby declare that rights under contract or law have been conveyed to and remain with the nonprofit organization with regard to the above identified-invention.

If the rights held by the nonprofit organization are not exclusive, each individual, concern or organization having rights in the invention is listed below and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Address \_\_\_\_\_

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss or entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate.

Reg. No. 29,147

  
Signature of Authorized  
Official and Attorney

**Tel.No. (505)667-3302**

**William A. Eklund**  
Name of Official

The Regents of the University of California  
Los Alamos National Laboratory  
LC/BPL, MS D412  
Los Alamos, NM 87545

Dated 06/26/00

## COSMIC RAY NEUTRON BACKGROUND REDUCTION USING LOCALIZED COINCIDENCE VETO NEUTRON COUNTING

This invention was made with government support under contract W-7405-ENG-36 awarded by the U.S. Department of Energy. The government has certain rights in this invention.

### Field of the Invention

The present invention relates to apparatus for and a method of reducing cosmic-ray background interference for improved neutron coincidence counting. More specifically, the present invention utilizes localized neutron coincidence veto ("LCV") to eliminate the counting of cosmic-ray generated background neutrons which have small multiplicity.

### Background of the Invention

Waste materials contaminated with small amounts of plutonium and other transuranic isotopes represent a major disposal problem. The higher the level of, for instance, plutonium, the more expensive the disposal (i.e., storage) cost. Enormous sums have been spent on long term waste storage sites, such as the Waste Isolation Pilot Plant in New Mexico for plutonium contaminated material.

As the neutrons emitted by plutonium can penetrate through the matrix materials of the boxes, drums and crates that are used to hold contaminated waste, passive neutron counting is the most effective method of measuring plutonium in bulk waste containers. To obtain a

quantitative relationship between the neutron emission rate and the mass of the plutonium in a given volume of waste material (e.g. in a drum), it is necessary to count the time-correlated (i.e., coincidence) neutrons from the waste to determine the spontaneous fission rate.

Detectors large enough to hold 200 liter drums of waste, in which thermal neutron counters are embedded in polyethylene walls, have been used for this purpose. Typically, such detectors will completely surround the waste container, for high counting efficiency to make the coincidence counting practical.

The primary limitation to the sensitivity (i.e., lower detectability limit) of the above described detection method is background interference caused by cosmic rays in the neutron counter and its immediate vicinity. The primary source is the carbon in the polyethylene detector body and adjacent polyethylene shield. Cosmic rays from space react with this carbon to create bursts of neutrons that interfere with the neutron coincidence counting of the sample.

Cosmic ray spallation (i.e., a nuclear reaction in which the energy of each incident particle is so high that more than two or three particles are ejected from the target nucleus) events create multiple neutrons detected in the neutron counter with a large range of multiplicity events. The large multiplicity events (i.e., more than three neutrons per fission) in the background can be separated from plutonium spontaneous fission by virtue of their high multiplicity. Spontaneous fission events from plutonium emit only a few neutrons (i.e., 1-5) per fission event, and only a couple of these are typically detected. Multiplicity sorting and statistical testing have been used to separate the cosmic ray initiated multiplicity events from the plutonium origin spontaneous fission neutrons. However, this is not a complete solution to

the interference problem, as about 60% of the cosmic ray background neutrons have only a small multiplicity that is the same as for the plutonium neutrons. Multiplicity sorting and statistical testing are described in, respectively: M.S. Krick, "Thermal Neutron Multiplicity Counting of Samples With Very Low Fission Rates," Los Alamos National Laboratory report LA-UR-97-2649 (1997); and D. H. Beddingfield and H.O. Menlove, "Statistical Data Filtration in Neutron Coincidence," Los Alamos National Laboratory report LA-12451-MS (November 1992). The general problem of cosmic ray spallation interference with low activity plutonium measurements using neutron coincidence counting is discussed in H.O. Menlove and G. W. Eccleston, "High-Sensitivity Measurements for Low-Level Tra Wastes Using Advanced Passive Neutron Techniques," Los Alamos National Laboratory report LA-UR-92-2563 (1992).

In addition to cosmic ray spallations from the carbon in the polyethylene detector body and adjacent shield, metals, such as iron in the waste and containers, are an additional source of cosmic ray spallation neutrons that limit plutonium detection sensitivity. These spallation events in the metal often generate high multiplicity neutrons that can be eliminated by the truncated multiplicity technique (as referenced in Krick, *supra*) or by the statistical data filter technique (as referenced in Beddingfield, et al., *supra*). However, there is a number (about half) of these spallation events that only produce a count of two neutrons (i.e., a doubles event). The number of counts with high multiplicity can be used to predict (by extrapolation) the number of doubles counts. This method is accurate to about 2-3%, depending on the counting statistics. However, counting times of approximately 15 minutes are required to obtain adequate statistics for high multiplicity counts. The weight of the metal in the container



can also be used to predict the coincidence background. However, this method has a large statistical fluctuation, which limits the plutonium detector sensitivity.

It is an object of the present invention to more accurately measure plutonium and other transuranic materials in waste materials.

5 It is another object of the present invention to measure plutonium in waste to a lower level of detection and, thus, save on the costs associated with storage and/or transportation of such waste.

It is another object of the present invention to reduce the counting of cosmic ray generated background neutrons having a small multiplicity.

10 It is yet another object of the invention to separate plutonium source neutrons from cosmic ray background neutrons to improve the accuracy and sensitivity of sorting nuclear wastes. Such improved accuracy will reduce the costs associated with storage of such wastes.

It is yet another object of the present invention to eliminate the small cosmic-ray multiplicity events which escape the above described truncation method.

15 It is yet still another object of the present invention to improve plutonium measurement sensitivity by eliminating from the counting many of the cosmic ray neutrons that are born in the waste being sample.

#### Summary of the Invention

20 This invention relates to both the apparatus and method for increasing the sensitivity of measuring the amount of radioactive material in waste by reducing the interference caused by cosmic ray generated neutrons. The apparatus includes: (a) a plurality of neutron detectors,

each of the detectors including means for generating a pulse in response to the detection of a neutron; and (b) means, coupled to each of the neutrons detectors, for counting only some of the pulses from each of the detectors, whether cosmic ray or fission generated. The means for counting includes a means that, after counting one of the pulses, vetos the counting of additional pulses for a prescribed period of time. The prescribed period of time is between 50 and 200 $\mu$ s. In the preferred embodiment the prescribed period of time is 128 $\mu$ s. The veto means can be an electronic circuit which includes a leading edge pulse generator which passes a pulse but blocks any subsequent pulse for a period of between 50 and 200 $\mu$ s. Alternately, the veto means is a software program which includes means for tagging each of the pulses from each of the detectors for both time and position, means for counting one of the pulses from a particular position, and means for rejecting those of the pulses which originate from the particular position and in a time interval on the order of the neutron die-away time in polyethylene or other shield material. The neutron detectors are grouped in pods, preferably at least 10. The apparatus also includes means for vetoing the counting of coincidence pulses from all of the detectors included in each of the pods which are adjacent to the pod which includes the detector which produced the pulse which was counted.

The method for increasing the sensitivity of measuring the amount of radioactivity in waste by reducing the interference caused by cosmic ray generated neutrons includes: (a) providing a plurality of neutron detectors, each of the detectors including means for generating a pulse in response to the detection of a neutron; (b) counting only some of the pulses from each of the detectors; and (c) vetoing the counting of coincidence pulses from each of the detectors for a prescribed period of time after the counting.

### Brief Description of the Drawings

Figure 1 is a top sectional view of the detector of the present invention, showing 5 of the 52 detector modules and a typical cosmic ray spallation event in the detector shield;

Figure 2 is a diagram of the circuit between the detector modules and a conventional  
5 neutron pulse time-correlation analyzer (not shown) used to implement the localized coincidence neutron veto (LCV) of the present invention in a multi-channel system; and

Figure 3 is a detailed view of the electronic circuit used to provide the LCV with a floating centroid to veto the two adjacent amplifiers to the amplifier that initiated the coincidence veto.

### Description of the Preferred Embodiment

As stated above, the primary source of cosmic ray spallation is the carbon in the polyethylene detector body and the adjacent polyethylene shield. Each of the spallation neutrons, which are created in the polyethylene, are attenuated as they migrate away from the point of birth. For instance, in 10 cm of polyethylene, the cosmic ray neutron population  
10 attenuates by a factor of, about, 5-10.

The present invention utilizes what we have termed localized neutron coincidence veto (LCV) methods to eliminate those cosmic-ray background neutrons having small multiplicity. More specifically, if two or more neutrons (whether from fission of Pu, or cosmic ray generated) arrive in a local volume of the detector in a given time window (0-128  $\mu s$ ), the  
20 coincidence event is rejected in the data analysis. To reject these cosmic ray coincidence neutrons, the detector of the present invention is separated into a plurality of separate modules

(sometimes referred to as pods). A minimum number of about 10 modules is typically required. There is no maximum number. Further, each module is designed to count only one neutron (whether cosmic ray or Pu generated) followed by a time delay of approximately 128  $\mu$ s before the next neutron can be counted. This design rejects most of the coincidence events from cosmic-ray spallation in the detector and shield because the neutron die-away time in polyethylene is, approximately, 50-100  $\mu$ s and because more than 75% of these neutrons fall within the time gate of 128  $\mu$ s. Thus, the second and third neutron that have to be counted to give a coincidence event are not registered by the detector electronics described below. In contrast, because Pu generated neutrons are from the sample volume in the cavity, there is only a low probability (i.e., approximately 10%) that both of the coincidence neutrons end up in the same or immediately adjacent detector module.

The LCV technique of the present invention also provides a better method of rejecting spallation neutrons that are born in the waste sample being analyzed by virtue of the direction of these spallation neutrons. The spallation neutrons that are born in the waste sample are emitted in a forward cone so that they enter the detector in a local area. Because of this, the LCV apparatus described below only permits the first of these sample born spallation neutrons to be counted, while the additional neutrons from the same spallation event are rejected. This eliminates the coincidence count.

The plutonium in the waste sample will still give coincidence counts by virtue of the 10-50 cm separation between the waste sample and the detector modules. Each module counts the first plutonium generated neutron and rejects the following neutrons from the same spontaneous fission event. Because of the small solid angle (between 0 and 4 steradians)

between the sample and the individual detector modules, the probability of detecting two or more neutrons in the same module is acceptably small (about 10%), so the ability to count the plutonium source neutrons is only reduced by 10-20%.

With reference to Figure 1, detector 11 includes a bottom 13, a top (not shown), three  
5 fixed side sections generally designated 15, and a door section 17. These components define a cavity 19 in which a box 21, or a 200 liter drum 22 (or other suitable container) holding waster material is placed for detection of plutonium and other transuranic materials. (Though both the drum and the box are illustrated, only one or the other would be in cavity 19 at any one time.) While an air gap is illustrated between box 21 and the interior walls of cavity 19, none is required. Conversely, there is no maximum air gap. The waste container can be made of any material, including steel, wood, plastic, and cardboard. (The material in the waste container may also include steel, plastic, wood and cardboard.) Surrounding the top, bottom 13, and sides 15 is a layer of polyethylene 23. Door 17 is also covered with a layer of polyethylene 25. To remove cosmic ray generated neutrons that are external to detector 11,  
10 layers 23 and 25 are, approximately, 6 inches thick. As indicated by arrow 27, door 17 slides sideways. As they form no part of the present invention, the mechanisms for supporting and opening and closing door 17 are not disclosed.

As is also shown in Figure 1, detector 11 includes a plurality of detector veto pods 31 (or modules), a few of which are illustrated. In the preferred embodiment there are a total of  
20 52 pods, 22 pods are included in sides 15; 10 pods, in door 17; and 10 pods in each of the top and bottom 13. Each pod 31 includes 5 detector tubes 33 embedded in polyethylene casing 35. For convenience of illustration, each pod is shown as having only 3 tubes 33. As those

skilled in the art will appreciate, the number of tubes per pod and the number of pods can be varied. The greater the number of tubes surrounding a cavity of a given size, the greater the efficiency of the design. However, increasing the number of tubes (whether tubes per pod, or pods) increases the cost of the detector. As those skilled in the art will also appreciate, each tube 33 includes a casing (not shown), an anode wire (also not shown) and is filled with  $^3\text{He}$ . Each anode wire is connected to a source of high voltage, a capacitor and a resistance. As this arrangement is well known in the art it has not been illustrated. As is also well known, the ionization resulting from a thermal neutron colliding with a  $^3\text{He}$  molecule produces a voltage pulse.

The LCV circuitry of the present invention is illustrated in Figures 2 and 3. The voltage pulses from each of the 5  $^3\text{He}$  filled tubes 33 of each pod 31 are connected to, for instance, preamp 41<sub>1</sub> which amplifies the voltage pulses and transmits them to the LCV (or veto) circuit 43<sub>1</sub>. In the preferred embodiment AMPTEK model A111 preamps are used. The signal from preamp 41<sub>1</sub> is fed to veto circuit 43<sub>1</sub>. Circuit 43<sub>1</sub> includes: negative input AND gates 45, 47 and 49 and 51; 53 is a logical OR; 55 and 57 are D flip flops used to store signals; and 59 (128 $\mu\text{s}$  One Shot) is a leading edge pulse generator having a 128 $\mu\text{s}$  pulse). Veto circuit 43<sub>1</sub> also includes an enable/veto switch 61. Except for enable/veto switch, veto circuits 43<sub>2</sub>-43<sub>n</sub> (wherein <sub>n</sub> is the total number of pods) are identical to veto circuit 43<sub>1</sub>.

Figure 2 shows the interconnections between the veto circuits 43<sub>1</sub>-43<sub>n</sub> (where, again, <sub>n</sub> is the total number of pods or modules) for each pod 31<sub>1</sub>-31<sub>n</sub> and the connection between each veto circuit and OR circuit 71, which combines the output of all the veto circuits. The combined output signal from OR circuit 71 goes to a commercial coincidence logic to register

the counts. For samples with high counting rates, the enable/veto switch 61 is used to directly send the signals from the preamplifiers 41<sub>1-n</sub> to the coincidence logic register to avoid dead time losses.

In operation, any pod that receives a neutron pulse sets a time delay that vetoes  
5 subsequent pulses for a period that is longer (100-200 $\mu$ s) than the neutron die-away time in the detector. For detector 11, the die-away time is about 60 $\mu$ s, so a time delay gate of 100-200 $\mu$ s eliminates over 95% of the subsequent neutrons. More specifically, the signal from a preamp 41 triggers the "One Shot" that gets stored in the FDCE flip-flops. The signal passes on but additional follow on signals are blocked for the 128 $\mu$ s One Shot time interval. This prevents  
10 two signal pulses from being in coincidence from that the same detector pod.

To make the veto volume (i.e., the volume for rejection of the second neutron) greater than the transmission distance (from birth to absorption) of the spallation neutrons in the polyethylene, the present invention vetoes the amplifier that receives the pulse as well as the amplifiers of the two adjacent pods. The center output of each veto circuit connects to the two  
15 adjacent veto circuits (i.e., "left" and "right" of AND gate 45) to trigger the vetos in the two nearest pods. Thus, each spallation event is always in the center of a three amplifier detector volume, wherein the center amplifier is defined by the first pulse.

As an alternative to the anti-correlation circuitry in the above described detector electronics, all of the amplifier outpost pulses can be collected in a computer and software  
20 provided to eliminate the localized neutron count from cosmic ray spallation (both from the polyethylene and any metal in the waste box). The data collected can be tagged for position and time, and those multiple counts from the same local position in a time interval on the order

of the neutron die-away time in polyethylene can be rejected. This is the same principle as the electronic rejection in the hardware, but the rejection is done in the software.

Table I sets forth the results obtained from 5 amplifier channels of the LCV system of the present invention. The off/on ratio in Table I represents the counting rate reduction factor for the different neutron sources tested. The primary result is the reduction of the cosmic ray spallation neutrons by a factor of 6. Adding 100 kg of lead near side 15 of cavity 19 increased the coincidence neutron spallation background count from 0.126 to 1.560, a factor of 12.4. However, the LCV of the present invention decreased the interference caused by the lead background by a factor of 4.

TABLE I. Prototype cosmic-Ray Veto Counter Data					
Sample Type	Veto	Singles (count/s)	Doubles (counts/s)	Triples (counts/s)	D Ratio off/on
Empty Detector	off	17.58	0.126	0.242	6.01
Empty Detector	on	18.05	0.021	0.001	
<sup>240</sup> Pu sample <sup>a</sup>	off	74.36	2.66	0.14	1.12
<sup>240</sup> Pu sample <sup>a</sup>	on	72.79	2.38	0.11	
45 kg Pb on wall	off	20.14	1.56	2.52	4.01
45 kg Pb on wall	on	19.85	0.39	0.064	

D represents doubles.

<sup>240</sup>Pu corresponds to a 0.7 gram sample located in the center of waste box 21.

For plutonium mass values above about 5 grams, the low background reduction provided by the LCV is not needed and the LCV circuitry is automatically turned off to avoid deadtime losses at high counting rates, where the background suppression of the present invention is not needed. Enable/veto switch 61 is controlled by conventional software which



monitors the totals rate. For totals rates above a selected threshold in the software that is based on the counting rate, the LCV circuitry is automatically disabled.

The minimum detectable mass limit for plutonium in a passive neutron measurement system depends on the neutron background from cosmic-ray spallation. The LCV method can reduce the background by about an order of magnitude. By combining the LCV method with the existing techniques that can reject high multiplicity events one can measure large waste containers with better accuracy and sensitivity than was previously possible to sort radioactive wastes with better precision and control. Thus, the wastes can be directed to the appropriate waste sites with the accompanying cost savings.

Whereas the drawings and accompanying description have shown and described the preferred embodiment of the present invention, it should be apparent to those skilled in the art that various changes may be made in the form of the invention without affecting the scope thereof.

We claim:

1. Apparatus for increasing the sensitivity of measuring the amount of radioactive material in waste by reducing the interference caused by cosmic ray generated neutrons, said apparatus comprising:
  - a) a plurality of neutron detectors, each of said detectors including means for generating a pulse in response to the detection of a neutron; and
  - b) means, coupled to each of said neutron detectors, for counting only some of said pulses from each of said detectors, whether cosmic ray or fission generated, said means for counting including a means that, after counting one of said pulses, vetos the counting of additional ones of said pulses for a prescribed period of time.
2. The apparatus of claim 1, wherein said prescribed period of time is between 50 and 200 $\mu$ s.
3. The apparatus of claim 2, wherein said prescribed period of time is 128 $\mu$ s.
4. The apparatus of claim 1, wherein said veto means is an electronic circuit.
5. The apparatus of claim 5, wherein said veto means includes a leading edge pulse generator which passes said one of said pulses but blocks any subsequent pulse for a period of between 50 and 200 $\mu$ s.
6. The apparatus of claim 1, wherein said veto means is a software program.
7. The apparatus of claim 6, wherein said software program includes means for tagging each of said pulses from each of said detectors for both time and

position, means for counting one of said pulses from a particular position, and means for rejecting those of said pulses which originate from said particular position and in a time interval on the order of the neutron die-away time in polyethylene or other suitable material.


8. The apparatus of claim 1, wherein said neutron detectors are grouped in pods.
9. The apparatus of claim 8, further including a plurality of means for counting and a like plurality of veto means, and wherein said detectors included in each of said pods are coupled to a one of said plurality of means for counting and to one of said veto means, said veto means vetoing said counting of said additional one of said pulses from all of said detectors included in said pod.
10. The apparatus of claim 9, further including means for vetoing said counting of said additional ones of said pulses from all of said detectors included in each of said pods which are adjacent to said pod which includes said detector which produced said pulse which was counted.
11. The apparatus of claim 8, wherein there are at least 10 of said pods.
12. The apparatus of claim 1, wherein said detectors are supported by a layer of material which shields said waste from neutrons generated outside of said layer.
13. The apparatus of claim 1, further including means for disabling said veto means for high counting rates.
14. A method for increasing the sensitivity of measuring the amount of radioactivity in waste by reducing the interference caused by cosmic ray generated neutrons, said method including the steps of:

- 5
- a) providing a plurality of neutron detectors, each of said detectors including means for generating a pulse in response to the detection of a neutron;
  - b) counting only some of said pulses from each of said detectors, whether cosmic ray or fission generated; and
  - c) vetoing the counting of additional ones of said pulses from each of
- 10 said detectors for a prescribed period of time after said counting.

15. The method of claim 14 wherein said prescribed period of time is between 50 and 200 $\mu$ s.

## ABSTRACT

This invention relates to both the apparatus and method for increasing the sensitivity of measuring the amount of radioactive material in waste by reducing the interference caused by cosmic ray generated neutrons. The apparatus includes: (a) a plurality of neutron detectors, each of the detectors including means for generating a pulse in response to the detection of a neutron; and (b) means, coupled to each of the neutrons detectors, for counting only some of the pulses from each of the detectors, whether cosmic ray or fission generated. The means for counting includes a means that, after counting one of the pulses, vetos the counting of additional pulses for a prescribed period of time. The prescribed period of time is between 50 and 200 $\mu$ s. In the preferred embodiment the prescribed period of time is 128 $\mu$ s. The veto means can be an electronic circuit which includes a leading edge pulse generator which passes a pulse but blocks any subsequent pulse for a period of between 50 and 200 $\mu$ s. Alternately, the veto means is a software program which includes means for tagging each of the pulses from each of the detectors for both time and position, means for counting one of the pulses from a particular position, and means for rejecting those of the pulses which originate from the particular position and in a time interval on the order of the neutron die-away time in polyethylene or other shield material. The neutron detectors are grouped in pods, preferably at least 10. The apparatus also includes means for vetoing the counting of coincidence pulses from all of the detectors included in each of the pods which are adjacent to the pod which includes the detector which produced the pulse which was counted.

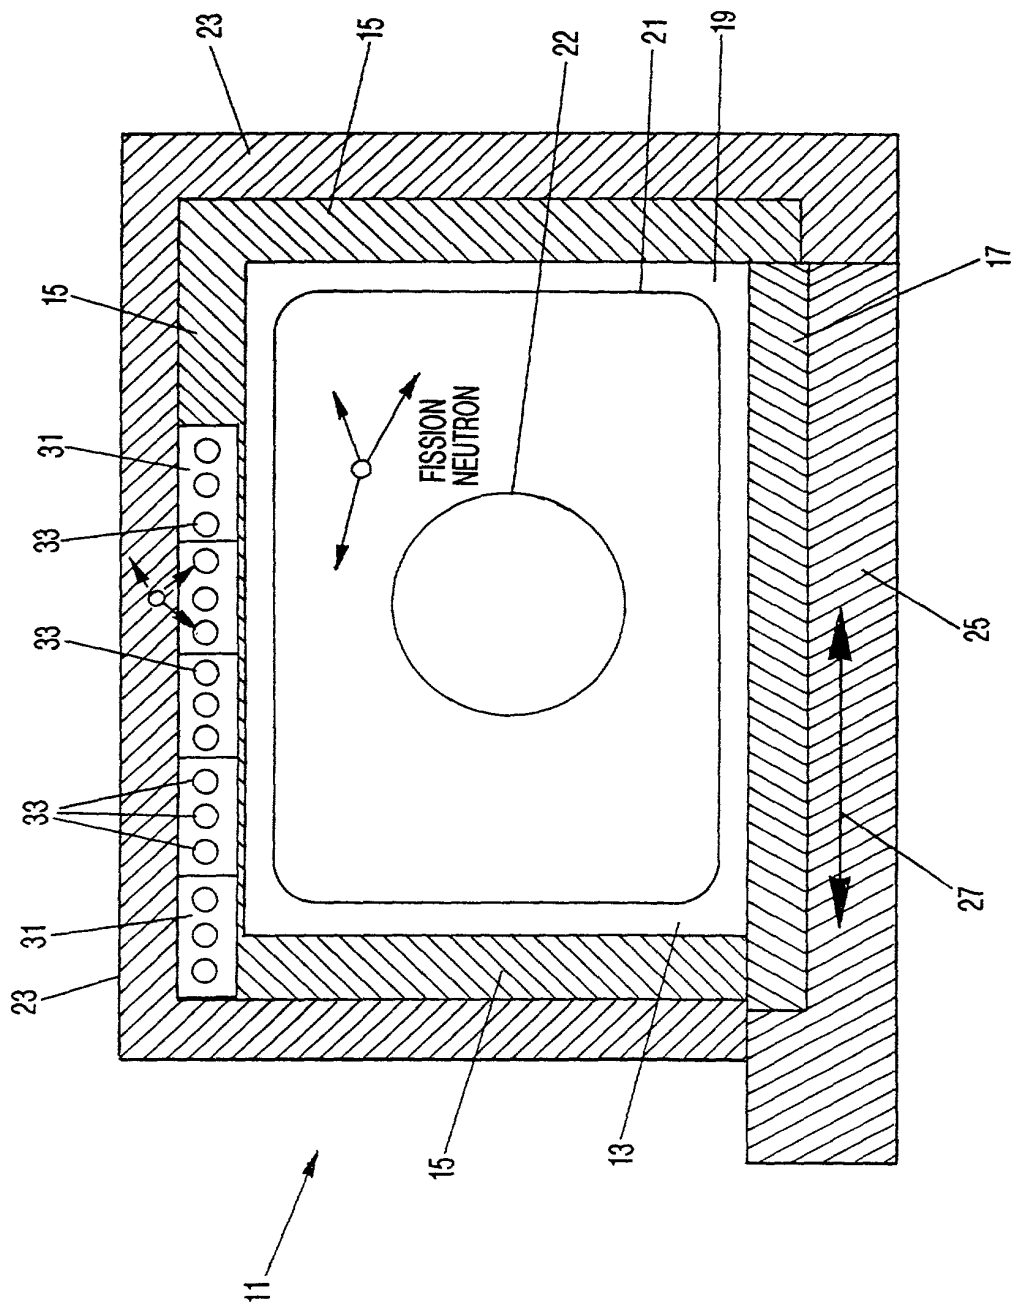

**FIG-1**

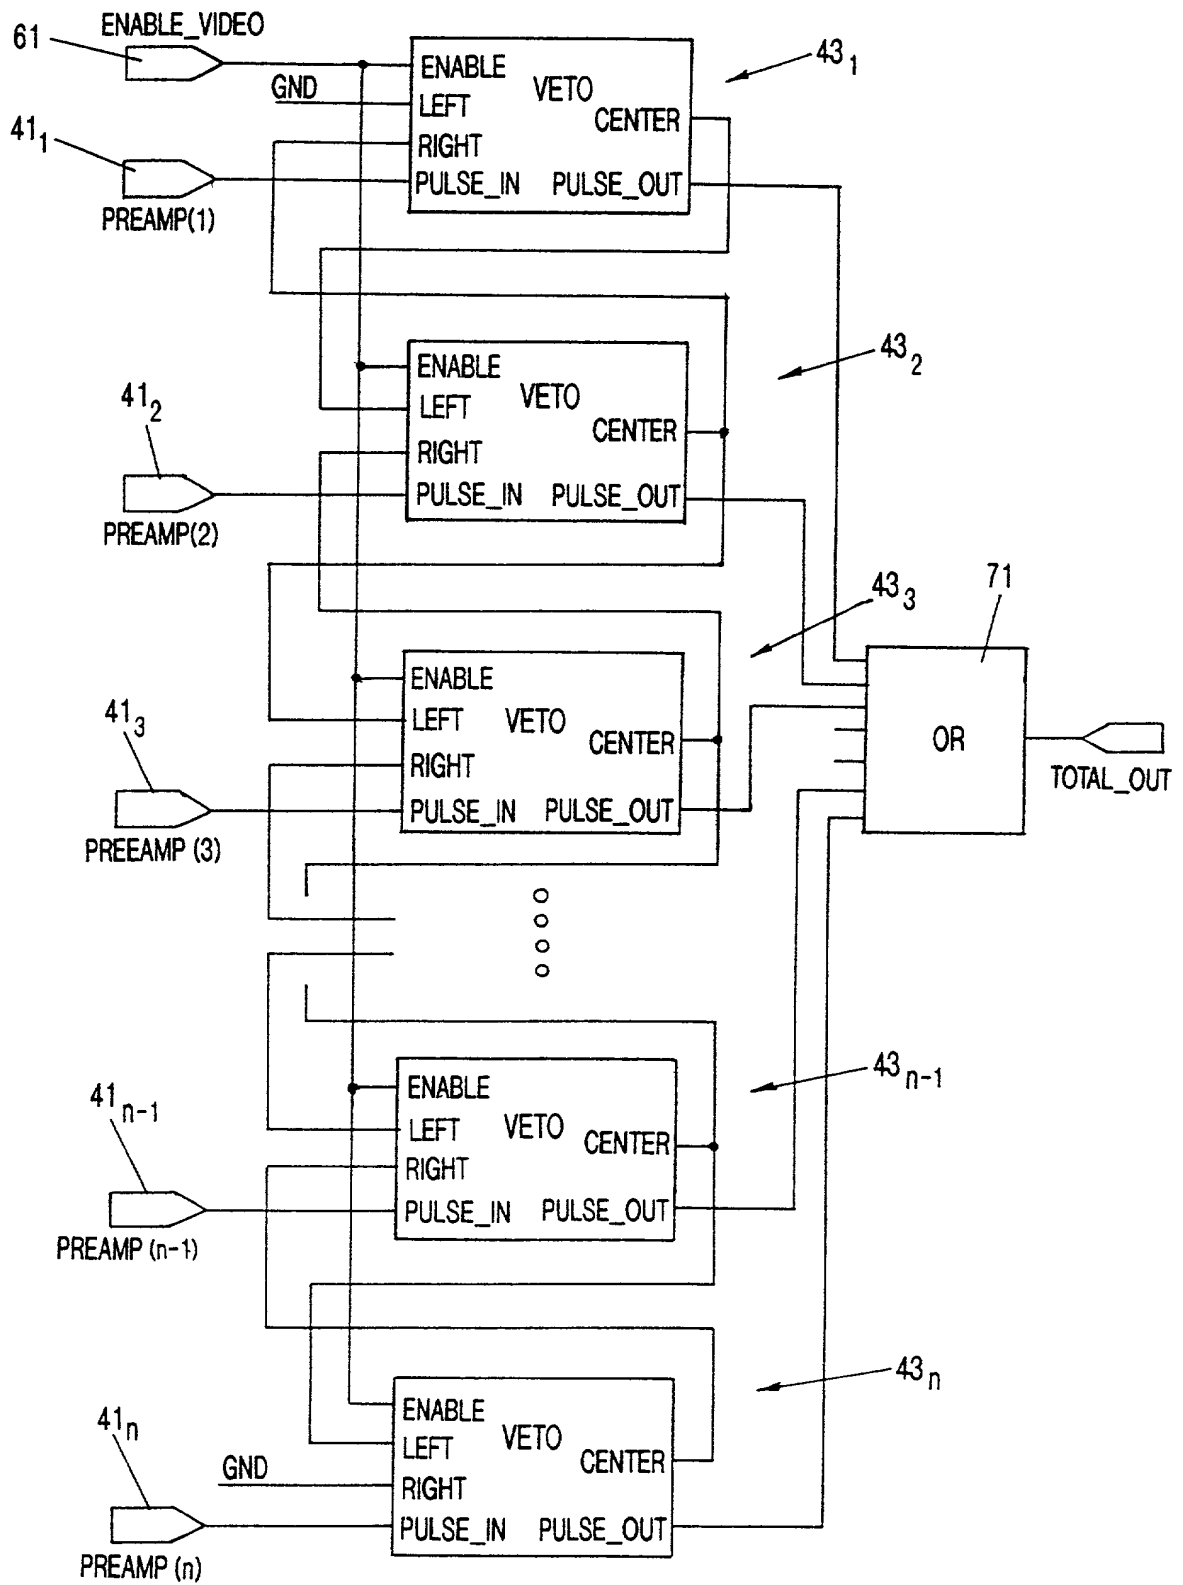


FIG-2

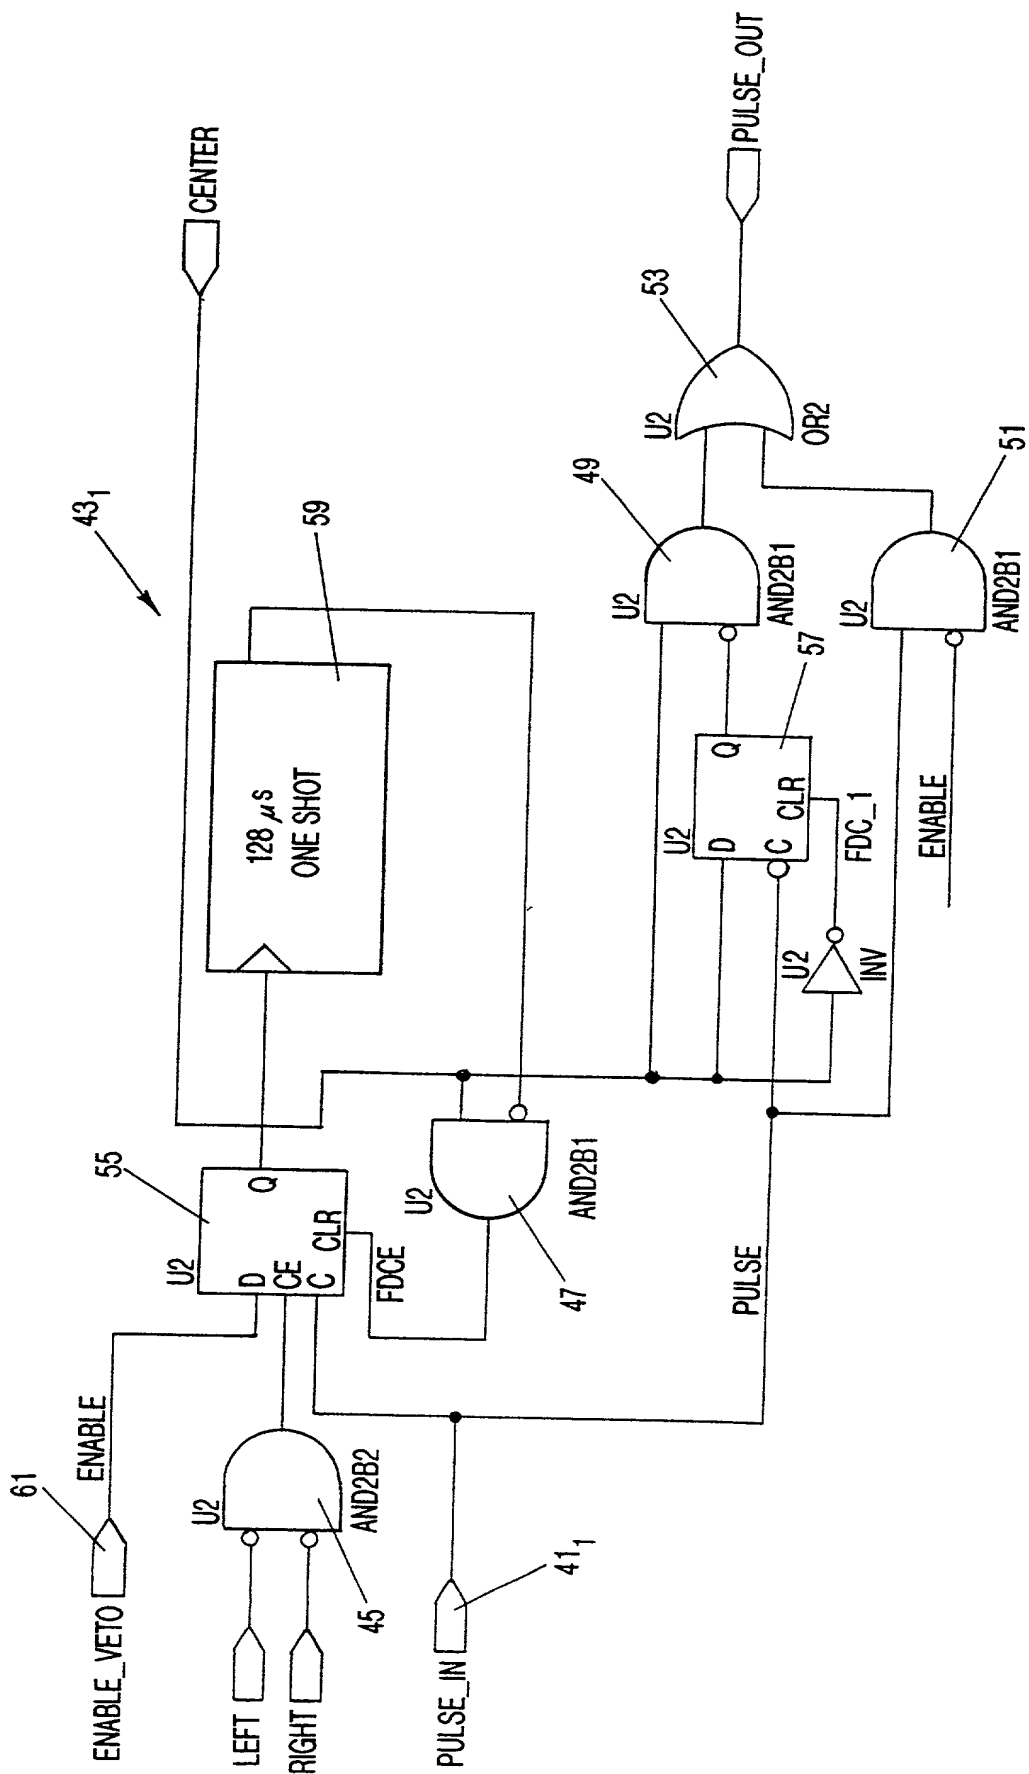


FIG-3



**COMBINED DECLARATION AND POWER OF ATTORNEY**

As the below named inventor(s), I (we) hereby declare that:

My (Our) residence, post office address and citizenship(s) are as stated below next to my (our) name(s).

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**COSMIC RAY NEUTRON BACKGROUND REDUCTION USING LOCALIZED COINCIDENCE VETO NEUTRON COUNTING**

the specification of which (check one) ☒ is attached hereto ☐ was filed on \_\_\_\_\_ as Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I (We) hereby state that I (we) have reviewed and understand the contents of the above-identified specification, including claims, as amended by any amendment referred to above.

I (We) acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37 CFR 1.56.

I (We) hereby claim foreign priority benefits under 35 USC §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

**PRIOR FOREIGN APPLICATION(S)**

Priority  
Claimed  
☐ ☐  
Yes No

Number	Country	Filed (Day/Month/Year)

**PRIOR U.S. APPLICATIONS**

I hereby claim the benefit under 35 USC §119(e) of any United States provisional application(s) listed below:

(Application Number)	Filing Date

(Application Number)	Filing Date




I (We) hereby claim the benefit under 35 USC §120 of any United States application(s) listed below and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 USC §112, I acknowledge the duty to disclose material information as defined in 37 CFR 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Serial No.	Filing Date	Status

**POWER OF ATTORNEY**

As the named inventor(s), I (we) hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Names and Registration Nos.	Names and Registration Nos.
William A. Eklund 29,147 Ray G. Wilson 28,351 Milton D. Wyrick 29,993 Samuel M. Freund 30,459	Bruce H. Cottrell 30,620 Gemma Morrison Bennett 34,516 Samuel L. Borkowsky 42,346 DeWitt M. Morgan 26,488
<u>Send Correspondence To:</u> DeWitt M. Morgan Rodey, Dickason, Sloan, Akin & Robb, P.A. PO Box 1888 Albuquerque, NM 87103	<u>Direct Telephone Calls to:</u> De Witt M. Morgan (505) 768-7375

Howard O. Menlove			
Full Name of Inventor		Signature	
Los Alamos, New Mexico		6/26/00	
Residence (City, State or Foreign Country)		Date	
4330 Ridgeway, Los Alamos, NM 87544		US	
Postal Address (Street, City, State, Zip Code)		Citizenship	
Steven C. Bourret			
Full Name of Inventor		Signature	
Los Alamos, New Mexico		6/26/00	
Residence (City, State or Foreign Country)		Date	
1 Arbol Court, Los Alamos, NM 87544		US	
Postal Address (Street, City, State, Zip Code)		Citizenship	
Merlyn S. Krick			
Full Name of Inventor		Signature	
Los Alamos, New Mexico		6/26/00	
Residence (City, State or Foreign Country)		Date	
3 La Flora Court, Los Alamos, NM 87544		US	
Postal Address (Street, City, State, Zip Code)		Citizenship	
Full Name of Inventor		Signature	
Residence (City, State or Foreign Country)		Date	
Postal Address (Street, City, State, Zip Code)		Citizenship	
Full Name of Inventor		Signature	
Residence (City, State or Foreign Country)		Date	
Postal Address (Street, City, State, Zip Code)		Citizenship	